

RX45 & RX54 Scissor Lifts

Maximum productivity, minimum space




RX Scissor Lift

Large capacity with a small footprint

EXCLUSIVE

Extra-Wide Runways

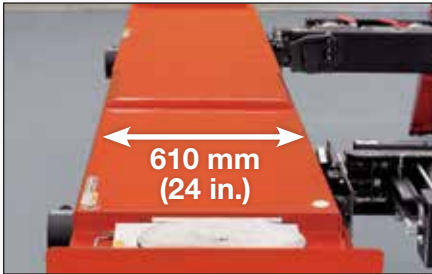

- ✓ 610 mm (24 in.) runways accept wide vehicles

STANDARD

Integrated Air Line Kit



- ✓ Convenient air source for tools at front and rear

PATENTED

Sensor Feedback System*




- ✓ Sensors keep runway level
- ✓ Safely stops if obstructed

* Shown with protective cover removed


EXCLUSIVE

Best-In-Class Drive-On Height

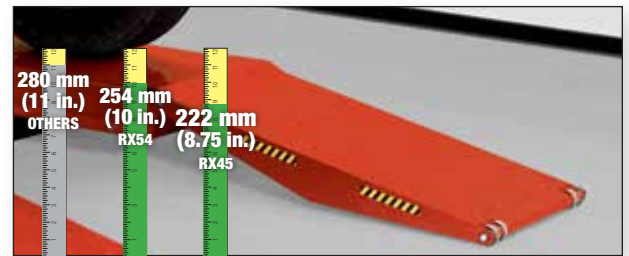

- ✓ Minimize clearance issues

RX10L-IS shown with optional light kit, swing air jacks, and front turnplates

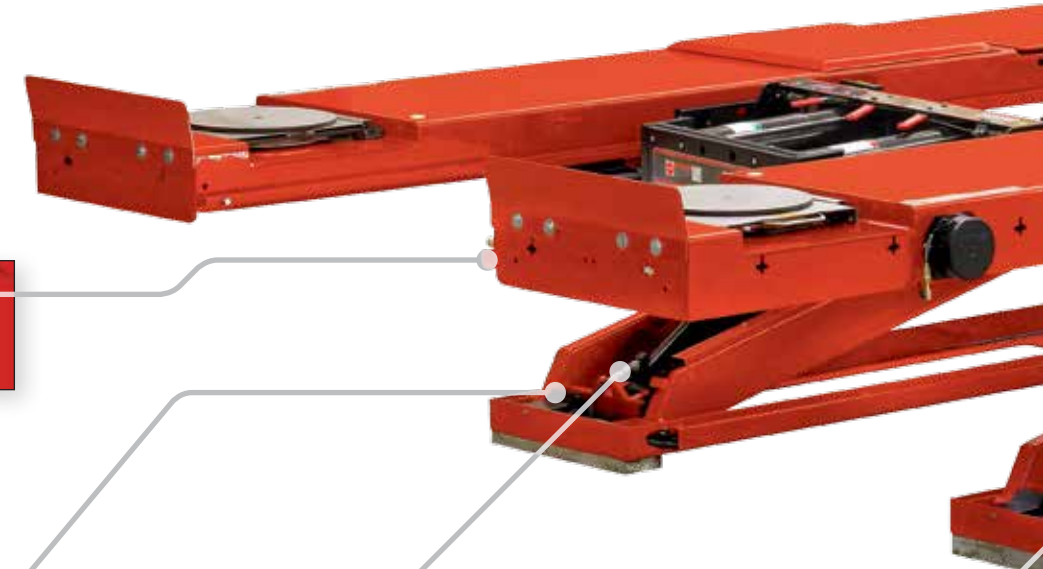

STANDARD

Velocity Safety Fuses



- ✓ Instantaneous shutdown in event of hydraulic failure

STANDARD


Safety Locks



- ✓ Precision-fit teeth lock runways at 16 level height positions

OPTIONAL


Swing Air Jacks

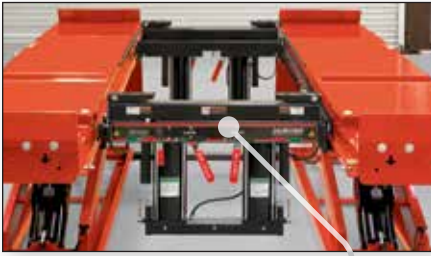

- ✓ 2722 kg (6,000-lb). capacity
- ✓ Technicians' favorite

EXCLUSIVE

Louvered Ramps

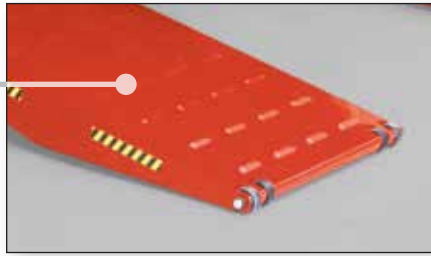

- ✓ Prevent wheel spin in wet conditions
- ✓ More effective than diamond tread or abrasive strips

PATENTED

Control Panel



- ✓ Complete operation from the console
- ✓ Optional PowerSlide® Inflation Station and FIA control



STANDARD

Pins and Bearings



- ✓ Chromed pins and teflon bearings for long life

EXCLUSIVE

Two Movable Work Steps



- ✓ 12 secure positions
- ✓ Lightweight design

PATENTED

OPTIONAL

Inflation Station



- ✓ Automatically fills or bleeds each tire
- ✓ No hanging air lines


EXCLUSIVE

Fast Descent Speed

The hydraulic system speeds lowering times by 50%.

The system automatically slows the descent in the last several inches to ensure a soft landing.

The fast descent feature is standard with Inflation Station (IS) models.

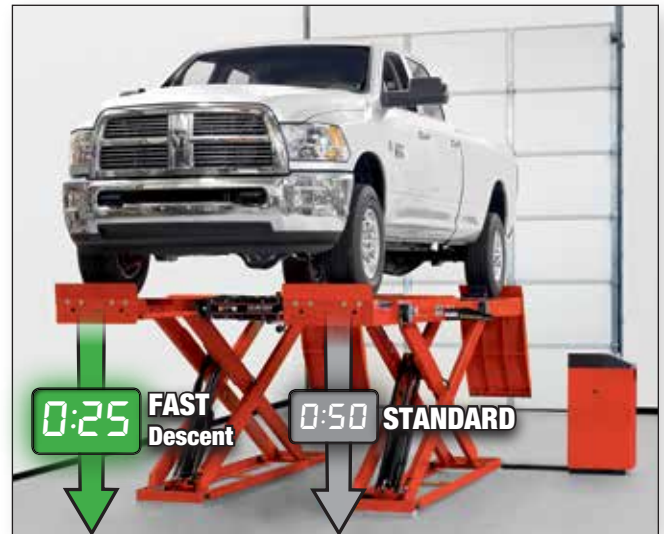

STANDARD

Swing Air Jacks

Hunter Swing Air Jacks add capabilities for lifting vehicles off the runways during alignment procedures and other multi-service operations.

Each 2722-kg (6,000-lb.) capacity Swing Air Jack combines low drive-on height with high lifting capacity needed to handle a wide range of vehicles.



133-69-1 – 2722 kg (6,000-lb.) Capacity Swing Air Jack

EXCLUSIVE *OPTIONAL*

Flush-Mount Installation

Lifts may be flush-mounted in a shallow recess. No more worries about lowered vehicles or expensive spoilers! This very tidy installation is ideal for “showcase” shops.

No additional charge for flush-mount option. Contact your authorized Hunter distributor for details.

**For flush-mount version,
add F to any RX model number.**



EXCLUSIVE *OPTIONAL*

AlignLights System

Hunter's integrated AlignLights LED lighting system provides a bright and efficient light source underneath the vehicle.

AlignLights automatically turns on when the lift is raised and turns off when the lift is lowered to the floor.

20-2766-1 – AlignLights system



Standard Equipment

- ✓ Flush-mounted, full-floating slipplates (PowerSlide® slipplates on PS and IS models)
- ✓ Two movable work steps (not included with flush-mount installations)
- ✓ Louvered ramps with built-in wheel stops
- ✓ Front wheel stops
- ✓ Two wheel chocks
- ✓ Built-in, full-length jack rails

OPTIONAL

Stage 2 RX Approach Ramp Extensions



305 mm (12 in.) kit – 20-3112-1.

Standard with RX54

432 mm (17 in.) kit – 20-3113-1.

Adds approx. 127 mm (5 in.) to RX54 when substituted for 20-3112-1



1016 mm (40 in.) kit – 20-2169-1.

Adds approx. 711 mm (28 in.) to RX54, Includes quick-release pins.

1270 mm (50 in.) kit – 20-2189-1.

Adds approx. 965 mm (38 in.) to RX54, Includes quick-release pins.

OPTIONAL

Drive-Thru Conversion Kits



1320 mm (52 in.) kit – 20-2498-1

For camera sensors, includes quick-release pins

1600 mm (63 in.) kit – 20-2501-1


For conventional sensors, includes quick-release pins

Hunter offers two fully integrated options to enhance productivity



FIA Fully Integrated Alignment

FIA allows WinAlign® aligners to control the lift features for ultimate productivity. Two patented designs offer greater flexibility and timesaving capabilities.

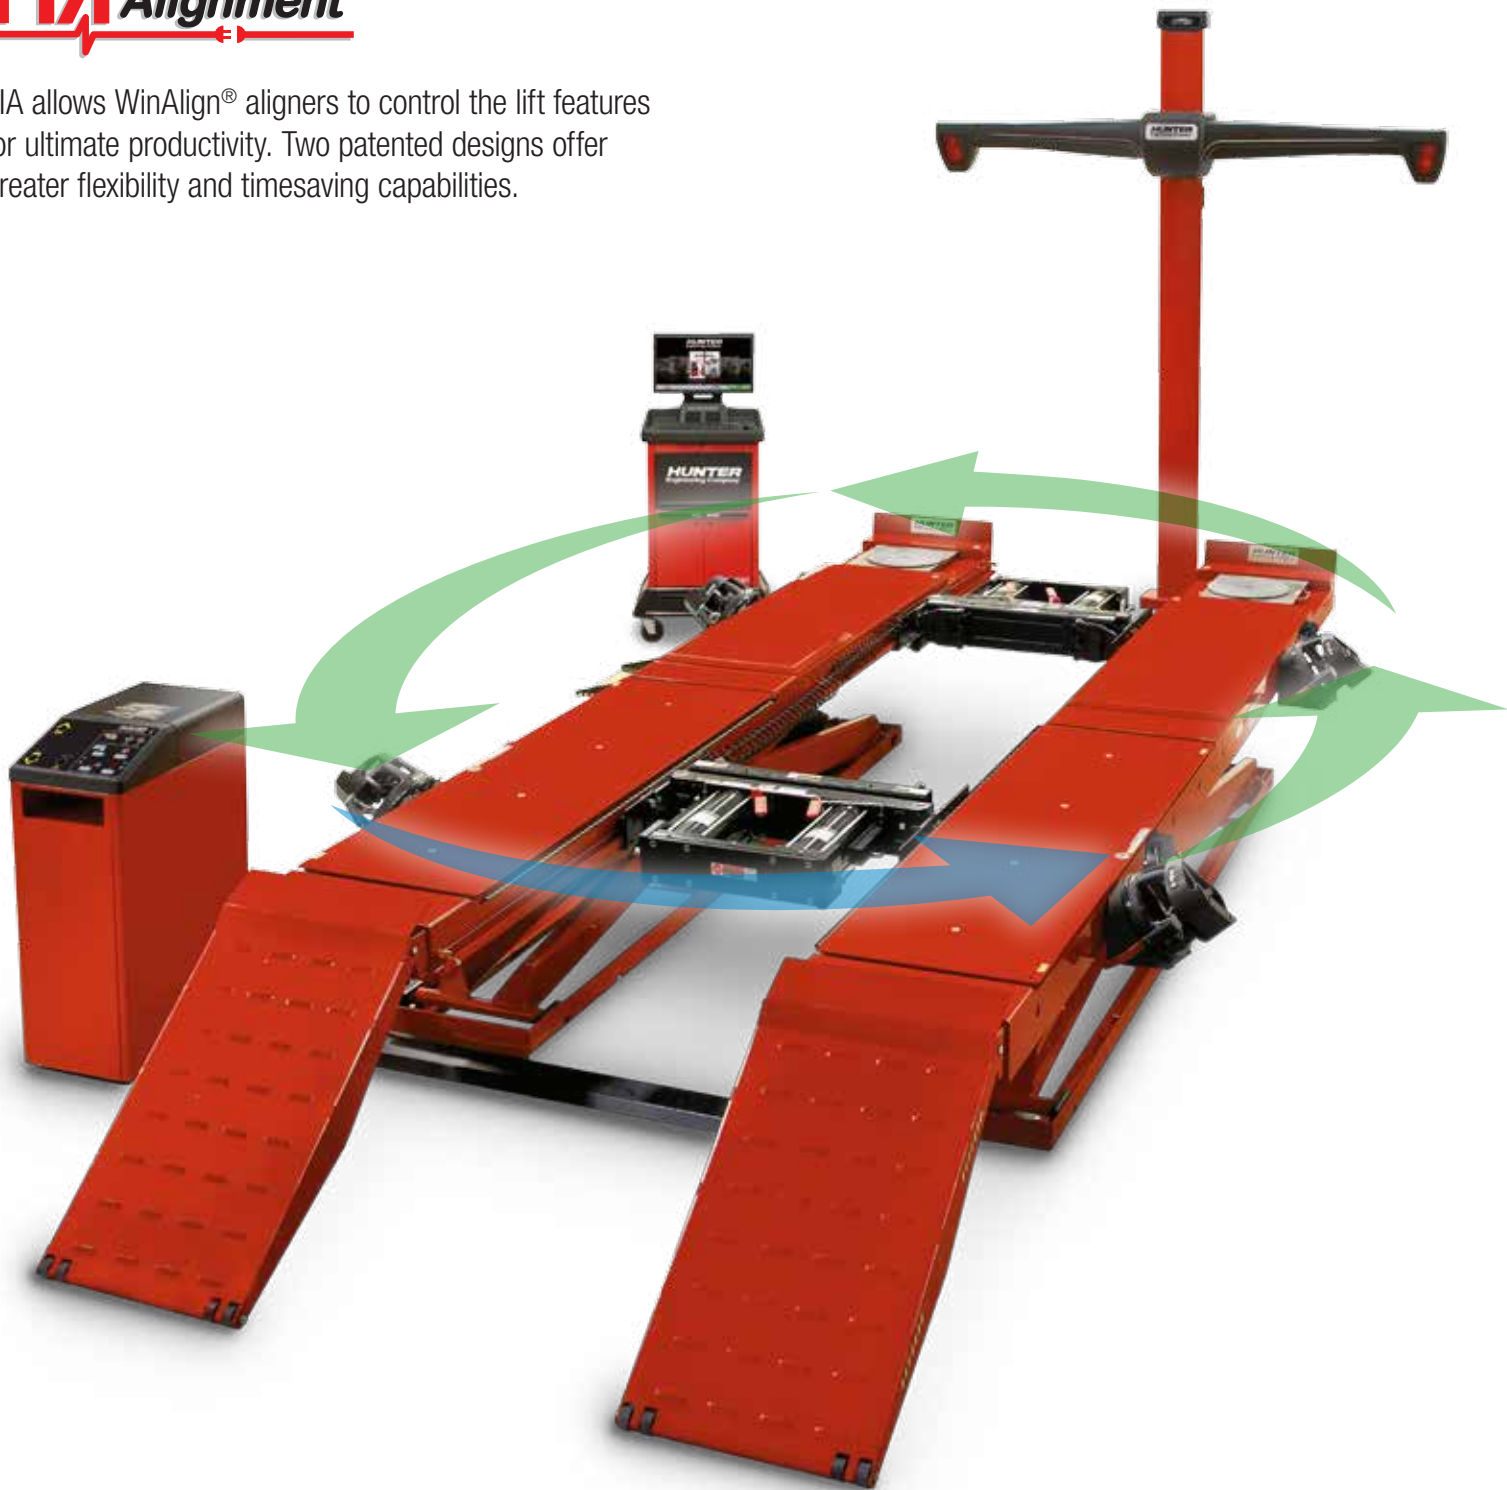

Shown with optional aligner console, sensors, swing air jacks, front turnplates, target support brackets, and lights

PATENTED

PowerSlide® Edition




OPTIONAL



- ✓ Locks slipplates and turnplates with the touch of a button or automatically through an FIA-equipped aligner*
- ✓ No more struggles with lock pins
- ✓ Avoid wear and tear and extend the life of your turnplates




OPTIONAL

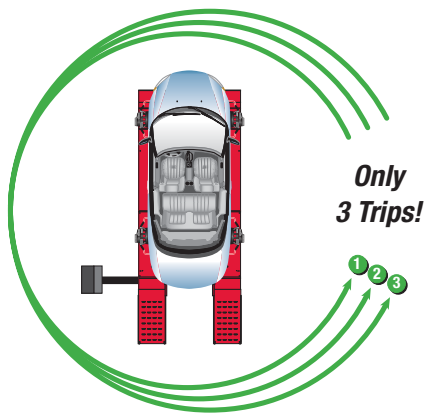

Minimize trips around the car

- 1 Mount targets
- 2 Make adjustments
- 3 Remove targets
- 4 Jack vehicle and compensate sensors
- 5 Lower leveling legs (if equipped)
- 6 Remove slipplate and turnplate pins
- 7 Replace slipplate and turnplate pins
- 8 Raise leveling legs (if equipped)

Yesterday's Technology

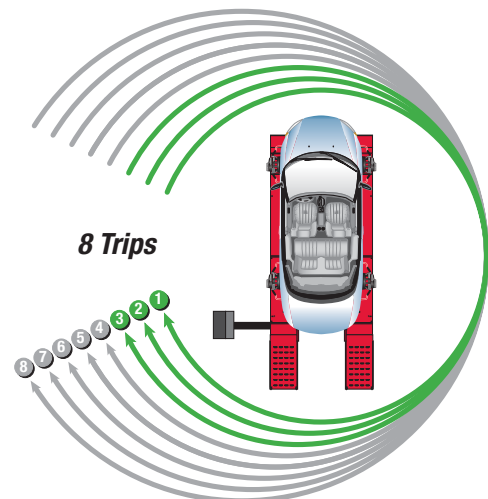

PATENTED

Inflation Station Edition



- ✓ Includes PowerSlide® slipplates
- ✓ Automatically inflate all four tires simultaneously
- ✓ Record starting and final pressure*
- ✓ Hose recoils to keep work area clear



Printouts show starting and final tire pressures.*


* Requires FIA equipped aligner with WinAlign® 10.x software or greater

Specifications

	RX45	RX45L	RX54
Max. vehicle weight	4500 kg (10000 lbs.)	4500 kg (10,000 lbs.)	5400 kg (12,000 lbs.)
Max. wheelbase	surface/flush		
General service	4343/4241 mm (171/167 in.)	4376/4572 mm 184/180 in.	4673/4572 mm 184/180 in.
Two-wheel alignment	4216/4115 mm (166/162 in.)	4547/4445 mm (179/175 in.)	4547/4445 mm (179/175 in.)
Four-wheel alignment	4013 mm (158 in.)		
Min. four-wheel alignment	2235 mm (88 in.)		
Lowered height	222 mm (8.75 in.)	254 mm (10 in.)	
Max. lifting height	1829 mm (72 in.)		
Alignment height	All lock positions		
Runway width	610 mm (24 in.)		
Tread width			
Min. inside	1016 mm (40 in.)		
Max. outside	2235 mm (88 in.)		
Air pressure	6.2-10.3 bar (90-150 psi)*		
Speed	55 seconds (raise), 25-50 seconds (descent)		

* 8.6 bar (125 psi) required for full jack capacity

RX Plan View

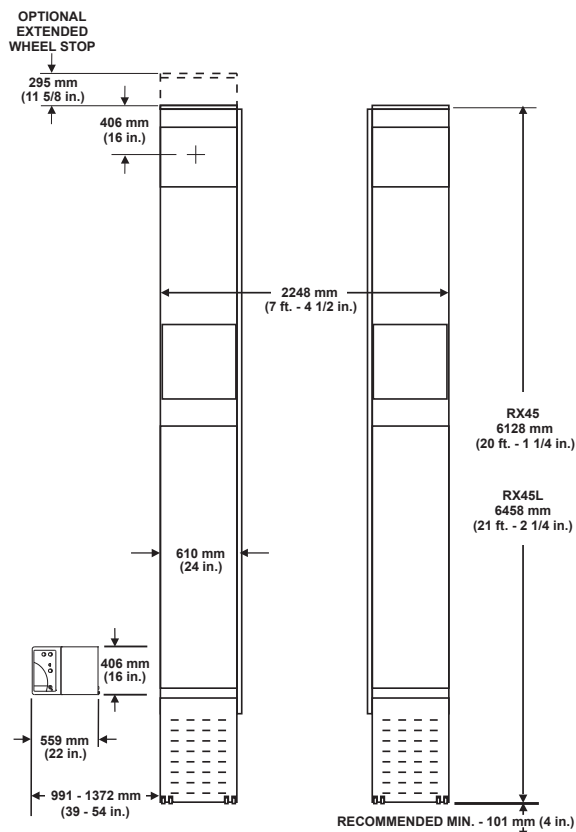

See Hunter Sales Representative for details on site requirement.

Models

	RX45-IS	RX45-PS	RX54-IS	RX54-PS
Fully Integrated Alignment	✓	✓	✓	✓
Inflation Station	✓		✓	
PowerSlide® slippates	✓	✓	✓	✓
Flush-mount	Add F to any RX model number (ex. RX54 F)			
Long-deck (RX45 models only)	Add L to any RX45 model number (ex. RX54 L -IS)			

Add one of the following suffixes to the desired model number listed above (ex. RX45-**435E**):

Suffix	Power Configuration
-215E	208/230V, 1PH, 50Hz
-216E	208/230V, 1PH, 60Hz
-435E	208/230/400/460V, 3PH, 50Hz

Options

133-69-1	2722 kg (6,000-lb.) Capacity Swing Air Jack
20-2532-1	Stainless steel turnplates (2)
20-2076-1	PowerSlide® Front Stainless Steel Turnplates with turnplate bridges (2)



Be sure to check out other Hunter literature for more quality products from Hunter Engineering.

Because of continuing technological advances, specifications, models and options are subject to change without notice.

PowerSlide and WinAlign are registered trademarks of Hunter Engineering Company. The PowerSlide logo is a trademark of Hunter Engineering Company.

0517FH

Copyright © 2017, Hunter Engineering Company

HUNTER

Engineering Company

www.hunter.com

11250 Hunter Drive, Bridgeton, MO 63044 U.S.A.
Tel: 1-314-731-3020 • Fax: 1-314-731-0132
E-mail: international@hunter.com

Form 6284-TE-05, 05/17 Supersedes form 6284-TE-05, 06/16